


**PART F – WIND SPECIFICATIONS**

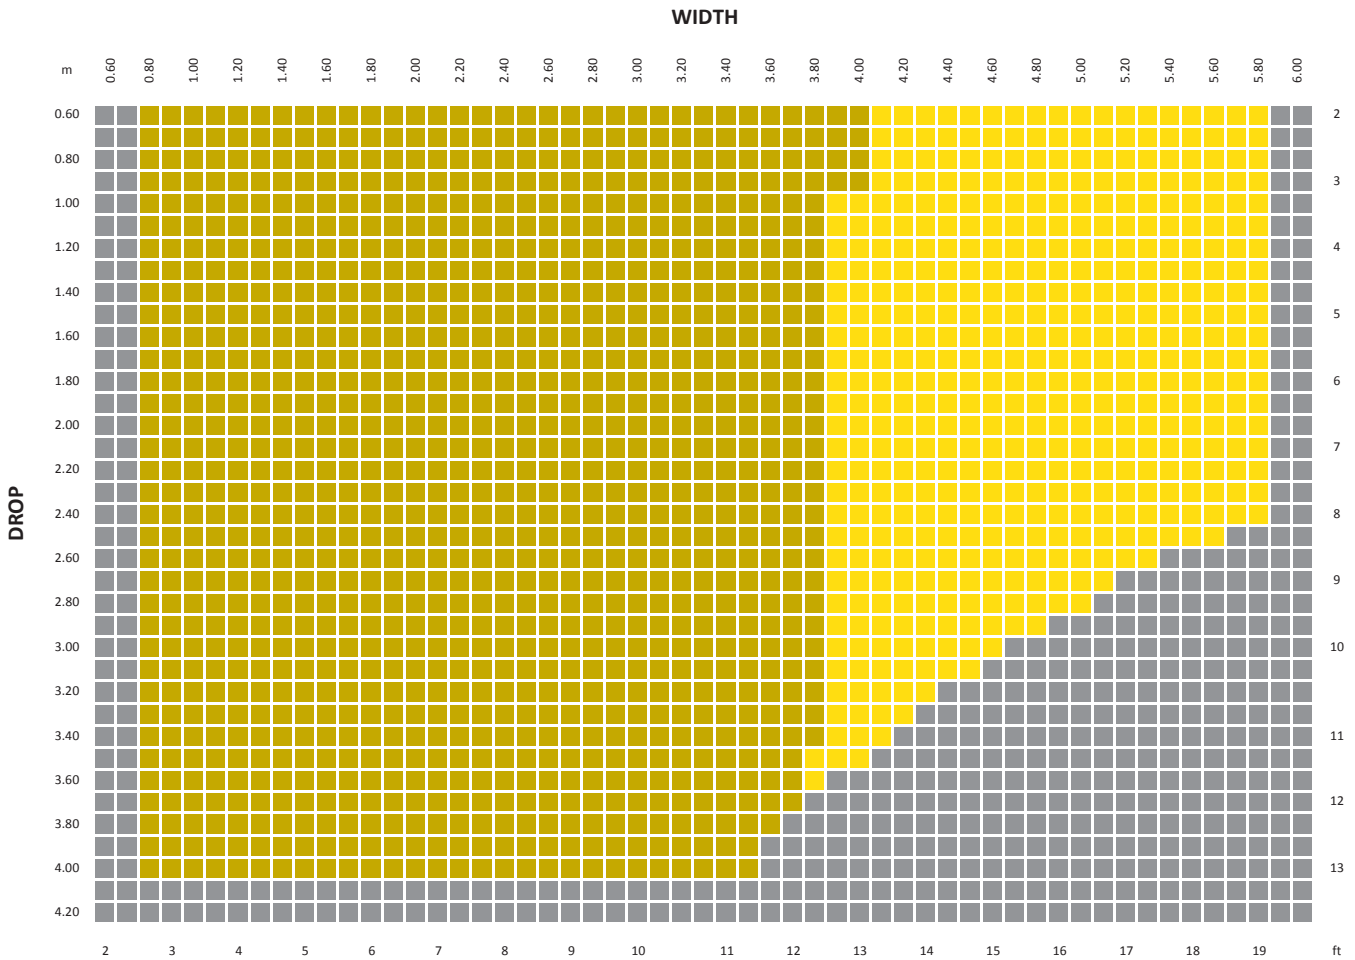

**Parameters:** 0.85mm Fabric Thickness, 573gsm (16.9oz/yd<sup>2</sup>)


LEGEND	DESCRIPTION
<span style="background-color: yellow; border: 1px solid black; display: inline-block; width: 20px; height: 10px;"></span>	Beaufort 5 - Wind Speed = 28-37 Km/h
<span style="background-color: #c4c400; border: 1px solid black; display: inline-block; width: 20px; height: 10px;"></span>	Beaufort 6 - Wind Speed = 38-48 Km/h
<span style="background-color: #a9a9a9; border: 1px solid black; display: inline-block; width: 20px; height: 10px;"></span>	Outside Product Specifications

Above charts are based on theoretical calculations using the following:

- Stainless steel 4mm rivets or #8 Tek screws to secure side rails at 500mm spacing for side and face fix applications
- Maximum allowable wind speeds (km/h) using solid fabric or 5% fabric openness.
- Fabrics with larger openness do not worsen results.

**BEAUFORT WIND SCALE**

The Beaufort Wind Force Scale estimates wind strength based on the effects wind has on the physical environment.

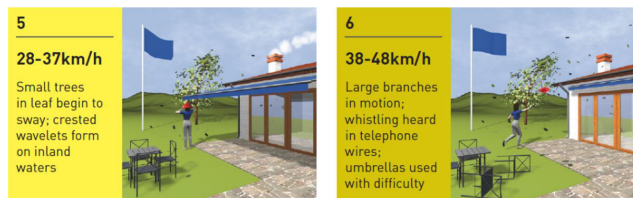

## SECTION E | WARRANTY

Rollease Acmeda provides a 5 year hardware warranty against defects to the original purchaser (the fabricator/manufacturer).

The hardware warranty is not to be transferred to the end consumer.

The hardware warranty is limited to the repair or resupply of defective hardware components to the fabricator/manufacturer only.

The hardware warranty is applicable to normal use. The hardware warranty when applied to external systems assumes the blinds are not used in strong winds/storms and not left down indefinitely.

The hardware warranty is not applicable for coastal applications unless specified in this manual.

The hardware warranty will not apply where the defect arises due to incorrect assembly and installation.

Retailers are obliged to supply consumers with their own warranty, if required, at the point of purchase.

