

# INSTALLATION GUIDE

## WOODLOOK VENETIAN BLINDS:

**Please Note: These instructions should be read thoroughly before installing.**

This is a guide to assist in the installation and care of your blinds. Betta Blinds & Awnings does not guarantee the accuracy of the information contained in this guide. We recommend an experienced expert installer to rely upon their own skills. This is based on general knowledge concerning the assembly, materials and working process of the blinds, which is known to us at the time of printing this guide, consequently, is subject to change and Betta Blinds & Awnings specifically reserves the right to change this guide without notification.

- ♦ **The person installing a corded internal window covering must attach a label to the corded window covering containing the name and contact details of the person or company responsible for the installation.**
- ♦ **They also must ensure that any warning label or swing tag supplied with the corded window covering remains attached to the cord.**

We recommend the use of the following Tools: Steel measuring tape, Carpenter's level, Power or battery drill & bits, Flat blade and Phillips head screwdrivers

### The following should be included for each venetian blind ordered

- Mounting brackets: One left hand and One right hand
- Support bracket(s) if required
- Hold down brackets – 1 pair if ordered.

- **We recommend clean, soft cotton gloves (or the rubber gloves supplied) be worn to avoid marking the fabrics when installing and handling fabric blinds.**

Since different screws are required to suit different fixing applications, we do not supply screws. Please ensure you use the correct screws for mounting to the desired application, for example Gyprock, timber, concrete, brick, steel, or aluminium.

**The most important procedure in installing these blinds is to be sure that the correct anchorage method has been used so that the mounting area (i.e., wall or architrave) is able to support the weight of the blind and its operation.**

- **Note: Brick or Rendered Surfaces Warning:** Make sure drilling is no closer than 25mm from edge of surfaces as the brick or render may chip or break out

### ● INSTALLATION

#### Face & Reveal

1. Check the marked width and drop sizes as indicated on the headbox against your original order
2. Each blind is marked to indicate the room location, as per your order form, to assist in establishing the correct fitting location of multiple blind orders.
3. If all is correct layout the blinds at their location and remove protective packaging.
4. Remove the supplied installation brackets and cords from their shipping position in the headbox.
5. Ensure that the blind has 2 brackets (LH / RH) supplied for each blind. Note: if the width of the blind exceeds 1550mm a centre support bracket should also be supplied and fitted. This is to be mounted off centre towards the cord lift end.
6. As these blind brackets are universal, they can be installed either face fit or reveal.
7. Level mounting is critical to the correct operation of the blind. (Achieved using a spirit level)
8. Fix the brackets either left or right as marked inside the brackets to the required location
9. These brackets have holes positioned for easy fitting through the top, sides and back sections depending on the application needs.
10. Betta Blinds supplies mounting brackets only and where appropriate the child safety devices.

## Headbox

- Once the brackets have been installed and levels checked open the access clips on the bracket and slide the headbox into the brackets
- Close the clips and **click** them into the locking position.
- Carefully lower the blind slats to the lowered position by releasing the cord lock mechanism and supporting the cords. Please ensure that both the tilt and lifting cords are free from tangles and knots and hanging unobstructed.
- Tilt the blinds open and closed to check the clearance and operation of the slats and mechanisms.
- If all is operating correctly install the optional hold down brackets into the bottom fixing points to match the pin location in the bottom rail of the blind
- For Face Fit Woodlook Pelmets with Returns.** Attach returns using the small “L” bracket supplied. Be careful not to break the pelmet when pushing the “L” brackets into place as they can be a tight fit
- Woodlook Venetians fix the brackets **carefully** to the rear of the pelmet by placing them in the desired positions for even hanging. Once their position is established hold the bracket sideways and insert the tabs into the groove in the back of the pelmet and turn the bracket 90 degrees clockwise to lock it into the groove correctly. Clip the pelmet over the front lip of the headbox and alter the alignment position if required.
- Providing that the handling, installation and care and maintenance is carried out correctly the quality of this product can supply many years of trouble-free operation.

## Maintenance and cleaning

Regularly remove surface dust gently with a clean dry soft cloth, feather duster or soft brush or wipe with a dry sponge. Recommended cleaning agent is mild detergent in lukewarm water. Stains and smudges can be removed with lukewarm water and neutral soap on a sponge. Professional ultrasonic cleaning can be undertaken by specialist cleaning businesses.

## Warranty

Betta Blinds guarantee the quality on all venetian slats free from defects for one (1) year from date of purchase. Betta Blinds guarantee the quality on all our blind components free from defects and/or failure for five (5) years from the date of purchase. The guarantee on Betta Blinds products does not cover defects or damage caused by accidents, alterations, misuse, abuse, wear and tear or failure to comply with cleaning and maintenance instructions. Betta Blinds does not warranty the fading of fabrics and venetians caused by direct and/or indirect sunlight. Under the guarantee Betta Blinds shall not be liable or responsible for incidental or consequential damages or any other direct or indirect damage, loss, cost, expense or fee.


# WARNING:

CURTAIN AND BLIND CORDS HAVE CAUSED THE DEATH OF YOUNG CHILDREN AND MUST BE INSTALLED SO THAT THEY ARE NOT A STRANGULATION HAZARD. FOLLOW THE INSTALLATION INSTRUCTIONS

## Keep children away from all cords/chains

Move anything a young child can sit in, stand in or climb on (like cots, highchairs, beds, sofas, tables, chairs and bookshelves) away from cords/chains—even those tied around a cleat, as your child may be able to untie them.

Do not let your child play near cords/chains they can easily reach. Never leave your child alone in a room with cords/chains they can reach.

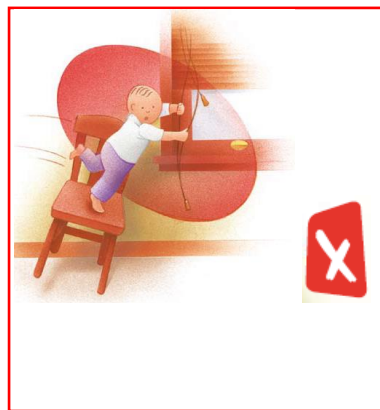

- ♦ To avoid creating a possible strangulation hazard for children, the corded internal window covering must be installed in such a way that a loose cord cannot form a loop 220mm or longer at a height of less than 1,600mm above floor level.
- ♦ No part of a cord guide may be installed lower than 1,600mm above floor level unless, the cord guide will remain firmly attached to a wall or structure specified in the installation instructions when subjected to tension force of 70 N applied in any direction for 10 seconds and the cord is sufficiently secured or tensioned to prevent the formation of a loop 200mm or longer.
- ♦ If a cord guide is installed lower than 1,600 above floor level it must be designed to prevent a child from being able to remove the cord.
- ♦ If a cleat is used to secure the cord it must be at least 1,600mm above floor level because a child is capable of unwinding a cord from a cleat.
- ♦ **The person installing a corded internal window covering must attach a label to the corded window covering containing the name and contact details of the person or company responsible for the installation.**
- ♦ **They also must ensure that any warning label or swing tag supplied with the corded window covering remains attached to the cord.**